



### Features

- » Wideband up to 12GHz
- » High Dynamic Range
- » Customization Available
- » Fully Integrated Module
- » Complete Link Option

### Applications

- » Replaces Coax Cable
- » Radio Over Fiber
- » Radio Astronomy
- » Remote Antenna Sites
- » Phased Array Radar
- » EW/ECM
- » Optical Delay Lines
- » SATCOM

### PHOTONIC SYSTEMS INC.

900 Middlesex Turnpike  
Building 5  
Billerica, MA 01821  
USA

Phone: 978-670-4990  
Fax: 978-670-2510

E-mail: [psi.info@photonicsinc.com](mailto:psi.info@photonicsinc.com)  
[www.photonicsinc.com](http://www.photonicsinc.com)

### Description

The PSI-1600-10UR is a high performance microwave photonic receiver providing wideband optical to electrical (O/E) conversion for RF signals up to 12 GHz. Along with a PSI-1600-10xT transmitter module, the PSI-1600-10UR provides a complete fiber optic link solution designed to replace coaxial cable or microwave repeaters for applications in military systems, satellite communications, radio astronomy, optical delay lines, cellular/wireless base stations or other RF/Microwave related systems. Part of the PSI-1600-10L series of microwave links, the PSI-1600-10UR receiver does not incorporate any RF post-amplifiers.


Custom performance, packaging, connectors and link gain configurations are also available. **Please contact PSI with your application needs.**

### RF Link Performance

Parameter	Condition	Min	Typ	Max	Units
Operating Bandwidth		0.045		12	GHz
Link Gain	@ 5 GHz			-32	dB
Noise Figure	@ 5 GHz			40	dB
Input IP3	@ 5 GHz	20	25		dBm
Spur Free Dynamic Range	1 Hz band @ 5 GHz	103	106		dB/Hz <sup>2/3</sup>
Gain Flatness	1-12 GHz			±3	dB
	Any 100 MHz band			±0.5	dB

Note: RF link performance specifications with -15 dBm RF<sub>in</sub> applied to the PSI-1600-10UT transmitter module

### PSI-1601-10L Typical Response Over Frequency

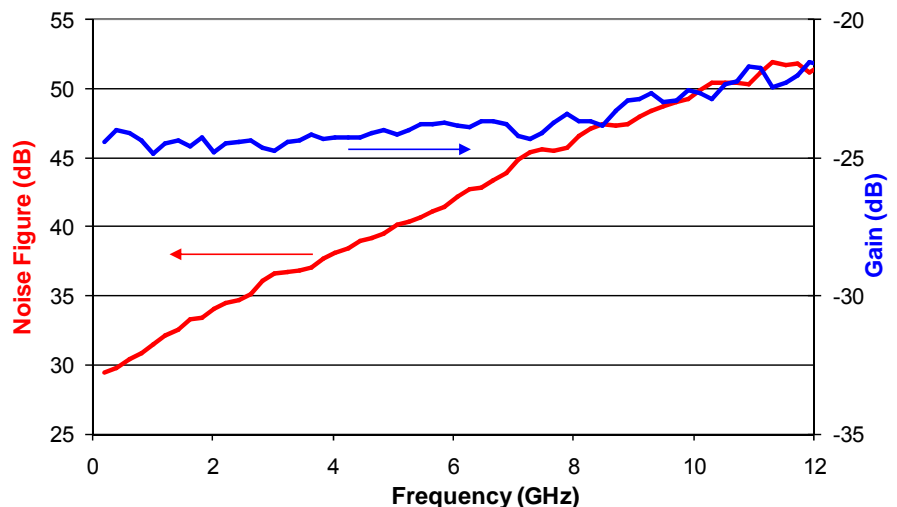

Rev. 5-12

### RF Characteristics

Parameter	Condition	Min	Typ	Max	Units
Frequency Range		0.045		12	GHz
RF Output Impedance			50		Ω
RF Return Loss		9.5	15		dB
RF Output Connector	SMA Female				

### Optical Characteristics

Parameter	Condition	Min	Typ	Max	Units
Wavelength		1300	1600	1556	nm
Optical Input Power				10	dBm
Responsivity	@ DC	0.7			A/W
Optical Output Connector	FC/APC Standard, please contact PSI for other options				

Note: User supplied fiber optic cable should be singlemode Corning SMF-28 or equivalent. In order to minimize distortion caused by optical reflections the optical cable return loss should be >55 dB (angled-polished connectors).


### Environmental Characteristics

Parameter	Condition	Min	Typ	Max	Units
Operating Temperature	Within Specifications	-20		70	°C
Storage Temperature	No damage	-40		70	°C
Humidity	Non-condensing	0		95	%

### DC Power and D-Connector

Pin	Description
1	+12 V <sub>DC</sub> at 15mA max.
2	Ground
3	NC
4	Ground
5	NC
6	NC
7	Ground
8	Ground
9	NC

### Mechanical Dimensions

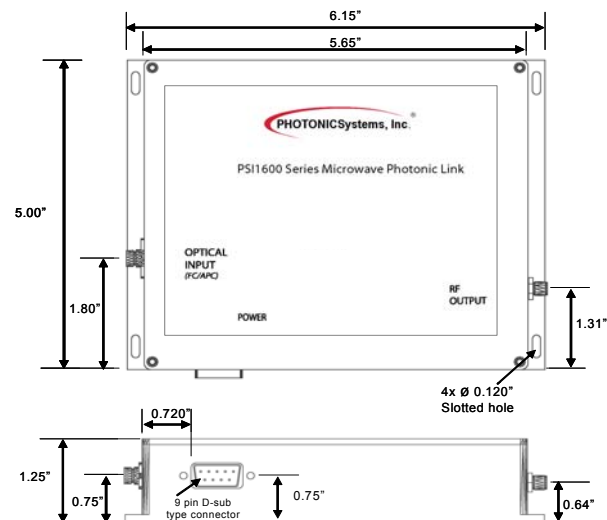

### Ordering Information

PSI Part Number	Description
PSI-1600-10UR	O/E Receiver Module
PSI-1601-10L	Microwave Photonic Link (PSI-1600-10UT and PSI-1600-UR)
PSI-1602-10L	Microwave Photonic Link (PSI-1600-10AT and PSI-1600-UR)

Rev. 5-12